

华娥压力表

HUAE PRESSURE GAUGE



地址：中国浙江省宁波市慈溪市观海卫镇施叶村下叶东47-48号
Add: No. 47-48, Xiayedong, Shiye Village, Guanhaiwei Town,
Cixi City, Ningbo City, Zhejiang Province, China
电话(TEL): 86-0574-63572107
传真(FAX): 86-0574-63572107
手机(M.T.): 13968288036
邮箱(E-mail): admin@cxhuae.com
网站: <http://www.cxhuae.com>

慈溪市华娥压力表有限公司
CIXI HUAE PRESSURE GAUGE CO., LTD.

公司简介

慈溪市华娥压力表有限公司，主要生产普通压力表、耐震压力表、不锈钢充油表、冷面表、打气表、电接点压力表、保护套压力表、轮胎表、记忆式压力表、CNG汽车压力表、真空压力表、其他压力表等产品。公司总部设在浙江慈溪市观城镇，329国道旁，距离宁波不到30公里，距离杭州湾跨海大桥10公里。交通十分便利，华娥压力表公司拥有完整、科学的质量管理体系。华娥压力表公司的诚信、实力和产品质量获得业界的认可。欢迎各界朋友莅临华娥压力表公司参观、指导和业务洽谈。

COMPANY PROFILE

Cixi Huae Pressure Gauge Co., Ltd. mainly produces general pressure gauge, shock-proof pressure gauge, stainless steel oil filling gauge, cold surface gauge, air pump gauge, electrical contact pressure gauge, protective jacket pressure gauge, tire gauge, memory pressure gauge, CNG automobile pressure gauge, vacuum pressure gauge, other pressure gauges and other products. The company is headquartered in Guancheng Town, Cixi City, Zhejiang Province, beside National Highway 329, less than 30 kilometers from Ningbo and 10 kilometers from Hangzhou Bay Bridge. Transportation is very convenient, Huae pressure gauge company has a complete and scientific quality management system. Huae pressure gauge company's integrity, strength and product quality are recognized by the industry. Welcome friends from all walks of life to visit Huae pressure gauge company, guidance and business negotiation.





隔膜压力表 Diaphragm pressure gauge

外经尺寸: 2.5' 4' 63mm 100mm
压力范围: 0-2.5MPa/350Psi
精度等级: 1.6% 2.5%
连接方式: DN25 Dn40
外壳材质: 不锈钢304
连接材质: 不锈钢304
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 不锈钢304

Outer size: 2.5'4'63mm 100mm
Pressure range: 0-2.5MPa/350Psi
Accuracy level: 1.6% 2.5%
Connection method: DN25 Dn40
Shell material: stainless steel 304
Connection material: stainless steel 304
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: stainless steel 304



卫生型隔膜压力表 Hygienic Diaphragm Pressure Gauge

外经尺寸: 2.5' 4' 63mm 100mm
压力范围: 0-10bar/150psi
精度等级: 1.6% 2.5%
连接方式: 卡箍式38mm 50.5mm 64mm
外壳材质: 不锈钢304
连接材质: 不锈钢304
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 不锈钢304

Outer size: 2.5'4'63mm 100mm
Pressure range: 0-10bar/150psi
Accuracy level: 1.6% 2.5%
Connection method: clamp type 38mm 50.5mm 64mm
Shell material: stainless steel 304
Connection material: stainless steel 304
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: stainless steel 304



电接点压力表 Electric contact pressure gauge

外经尺寸: 4' 100mm
压力范围: 0-25MPa/3500Psi
精度等级: 1.6% 2.5%
连接方式: 20X1.5
外壳材质: 不锈钢304
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 4'100mm
Pressure range: 0-25MPa/3500Psi
Accuracy level: 1.6% 2.5%
Connection method: 20X1.5
Shell material: stainless steel 304
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper



电接点压力表 Electric contact pressure gauge

外经尺寸: 4' 100mm
压力范围: 0-4MPa/580psi
精度等级: 1.6% 2.5%
连接方式: 20x1.5
外壳材质: 铁
连接材质: 不锈钢
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜


Outside size: 4'100mm
Pressure range: 0-4MPa/580psi
Accuracy level: 1.6% 2.5%
Connection method: 20x1.5
Shell material: iron
Connection material: stainless steel
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper



温度压力表 Temperature gauge

外经尺寸: 2.5' 63mm
压力范围: 0-10bar
精度等级: 1.6% 2.5%
连接方式: 1/4BSP 1/2BSP
外壳材质: 铁
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outer size: 2.5'63mm
Pressure range: 0-10bar
Accuracy level: 1.6% 2.5%
Connection method: 1/4BSP 1/2BSP
Shell material: iron
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper

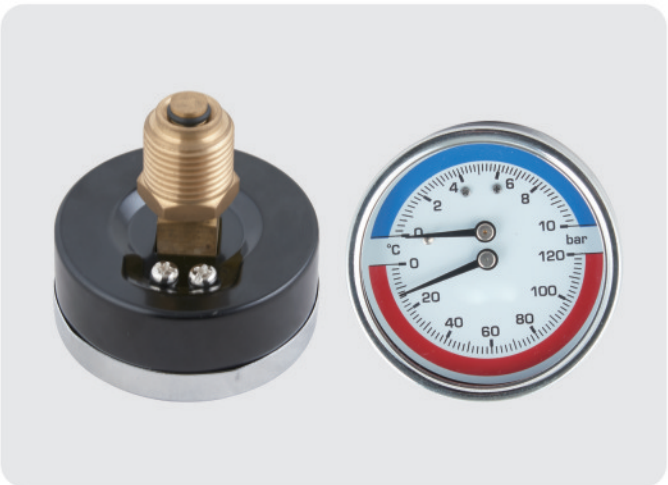

温度压力表 Temperature gauge

外经尺寸: 2.5' 63mm
压力范围: 0-10bar
精度等级: 1.6% 2.5%
连接方式: 1/4BSP 1/2BSP
外壳材质: 铁
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outer size: 2.5'63mm
Pressure range: 0-10bar
Accuracy level: 1.6% 2.5%
Connection method: 1/4BSP 1/2BSP
Shell material: iron
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper



数字压力表 Digital pressure gauge

外经尺寸: 2.5' 63mm
压力范围: 0-14bar
精度等级: 1% 1.6%
连接方式: 1/4BSP
外壳材质: 塑料
连接材质: 铜
窗口材质: 塑料
针和盘材质: 铝
内部材质: 铜或电子

Outer size: 2.5'63mm
Pressure range: 0-14bar
Accuracy level: 1% 1.6%
Connection method: 1/4BSP
Shell material: plastic
Connection material: copper
Window material: plastic
Needle and disc material: aluminum
Internal material: copper or electronics



膜盒压力表 Diaphragm pressure gauge

外经尺寸: 2.5' 63mm
压力范围: 0-100mbar
精度等级: 1.6% 2.5%
连接方式: 1/4BSP
外壳材质: 铁或不锈钢
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜


Outside size: 2.5'63mm
Pressure range: 0-100 mbar
Accuracy level: 1.6% 2.5%
Connection method: 1/4BSP
Shell material: iron or stainless steel
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper



制冷压力表和阀 Refrigeration pressure gauge and valve

外经尺寸: 70mm
压力范围: 0-1.5MPa/220PSI
0-3.5MPa/500PSI
精度等级: 1.6% 2.5%
连接方式: 1/8NPT
外壳材质: 铁
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 70mm
Pressure range: 0-1.5MPa/220PSI
0-3.5MPa/500PSI
Accuracy level: 1.6% 2.5%
Connection method: 1/8NPT
Shell material: iron
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper

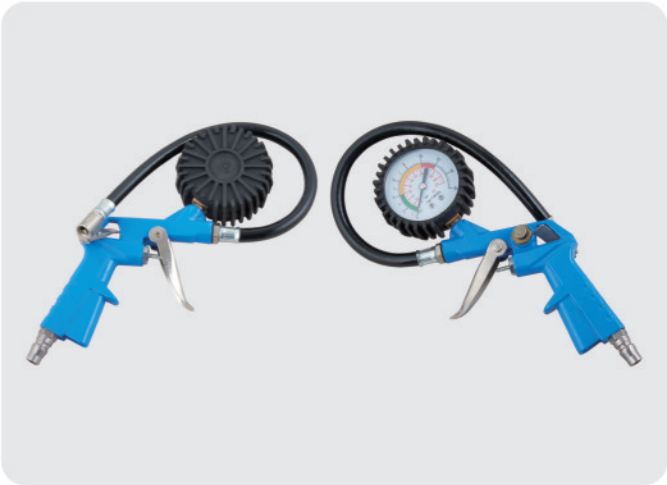

胎压计和胎压枪 Tire pressure gauge and gun

外经尺寸: 2.5' 63mm
压力范围: 0-16KG
精度等级: 1.6% 2.5%
连接方式: 1/8NPT
外壳材质: 塑料
连接材质: 铜或铁
窗口材质: 塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 2.5' 63mm
Pressure range: 0-16KG
Accuracy level: 1.6% 2.5%
Connection method: 1/8NPT
Shell material: plastic
Connection material: copper or iron
Window material: plastic
Needle and disc material: aluminum
Internal material: copper

全不锈钢压力表和耐震压力表
All stainless steel pressure gauge and shockproof pressure gauge



外经尺寸: 4' 100mm
压力范围: 0-10KG
精度等级: 1.6% 2.5%
连接方式: 3/8PT
外壳材质: 不锈钢
连接材质: 不锈钢
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 不锈钢

Outside size: 4'100mm
Pressure range: 0-10KG
Accuracy level: 1.6% 2.5%
Connection method: 3/8PT
Shell material: stainless steel
Connection material: stainless steel
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: stainless steel



外经尺寸: 4' 100mm
压力范围: 0-100KG
精度等级: 1.6% 2.5%
连接方式: 3/8NPT
外壳材质: 不锈钢
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 4'100mm
Pressure range: 0-100KG
Accuracy level: 1.6% 2.5%
Connection method: 3/8NPT
Shell material: stainless steel
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper

全不锈钢压力表和耐震压力表
All stainless steel pressure gauge and shockproof pressure gauge



外经尺寸: 4' 100mm
压力范围: 0-20KG
精度等级: 1.6% 2.5%
连接方式: 3/8NPT
外壳材质: 不锈钢
连接材质: 不锈钢
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 不锈钢

Outside size: 4'100mm
Pressure range: 0-20KG
Accuracy level: 1.6% 2.5%
Connection method: 3/8NPT
Shell material: stainless steel
Connection material: stainless steel
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: stainless steel



外经尺寸: 4' 100mm
压力范围: 0-10KG/140PSI
精度等级: 1.6% 2.5%
连接方式: 1/2NPT
外壳材质: 不锈钢
连接材质: 不锈钢
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 不锈钢

Outside size: 4'100mm
Pressure range: 0-10KG/140PSI
Accuracy level: 1.6% 2.5%
Connection method: 1/2NPT
Shell material: stainless steel
Connection material: stainless steel
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: stainless steel



外经尺寸: 2.5' 63mm
压力范围: 0-10KG/140PSI
精度等级: 1.6% 2.5%
连接方式: 1/2NPT
外壳材质: 不锈钢
连接材质: 不锈钢
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 不锈钢

Outside size: 2.5' 63mm
Pressure range: 0-10KG/140PSI
Accuracy level: 1.6% 2.5%
Connection method: 1/2NPT
Shell material: stainless steel
Connection material: stainless steel
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: stainless steel



外经尺寸: 3' 75mm
压力范围: 0-10KG/150PSI
精度等级: 1.6% 2.5%
连接方式: 3/8PT
外壳材质: 不锈钢
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 3'75mm
Pressure range: 0-10KG/150PSI
Accuracy level: 1.6% 2.5%
Connection method: 3/8PT
Shell material: stainless steel
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper

全不锈钢压力表和耐震压力表
All stainless steel pressure gauge and shockproof pressure gauge



外形尺寸: 2.5' 63mm
压力范围: 0~400bar/6000psi
精度等级: 1.6% 2.5%
连接方式: 1/4PT
外壳材质: 不锈钢
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 不锈钢

Outside size: 2.5' 63mm
Pressure range: 0~400bar/6000psi
Accuracy level: 1.6% 2.5%
Connection method: 1/4PT
Shell material: stainless steel
Connection material: stainless steel
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: stainless steel



外形尺寸: 2.5' 63mm
压力范围: 0~350bar/5000PSI
精度等级: 1.6% 2.5%
连接方式: 1/4NPT
外壳材质: 不锈钢
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 2.5' 63mm
Pressure range: 0~350bar/5000PSI
Accuracy level: 1.6% 2.5%
Connection method: 1/4NPT
Shell material: stainless steel
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper



外形尺寸: 2.5' 63mm
压力范围: 0~100bar/1500psi
精度等级: 1.6% 2.5%
连接方式: 1/4BSP
外壳材质: 不锈钢
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 2.5' 63mm
Pressure range: 0~100bar/1500psi
Accuracy level: 1.6% 2.5%
Connection method: 1/4BSP
Shell material: stainless steel
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper



外形尺寸: 2.5' 63mm
压力范围: 0~1000KG/15000PSI
精度等级: 1.6% 2.5%
连接方式: 1/4PT
外壳材质: 不锈钢
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 2.5' 63mm
Pressure range: 0~1000KG/15000PSI
Accuracy level: 1.6% 2.5%
Connection method: 1/4PT
Shell material: stainless steel
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper

全不锈钢压力表和耐震压力表
All stainless steel pressure gauge and shockproof pressure gauge



外形尺寸: 2.5' 63mm
压力范围: 0~1MPa
精度等级: 1.6% 2.5%
连接方式: 1/4PT
外壳材质: 不锈钢
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 2.5' 63mm
Pressure range: 0~1MPa
Accuracy level: 1.6% 2.5%
Connection method: 1/4PT
Shell material: stainless steel
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper



外形尺寸: 2' 50mm
压力范围: 0~1MPa
精度等级: 1.6% 2.5%
连接方式: 1/4PT
外壳材质: 不锈钢
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 2' 50mm
Pressure range: 0~1MPa
Accuracy level: 1.6% 2.5%
Connection method: 1/4PT
Shell material: stainless steel
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper

耐震压力表和全不锈钢压力表
Shockproof pressure gauge and all stainless steel pressure gauge



外形尺寸: 2.5' 63mm
压力范围: 0~2.5MPa
精度等级: 1.6% 2.5%
连接方式: 1/4PT
外壳材质: 不锈钢
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 2.5' 63mm
Pressure range: 0~2.5MPa
Accuracy level: 1.6% 2.5%
Connection method: 1/4PT
Shell material: stainless steel
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper



外形尺寸: 2' 50mm
压力范围: 0~10KG
精度等级: 1.6% 2.5%
连接方式: 7/16
外壳材质: 不锈钢
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 2' 50mm
Pressure range: 0~10KG
Accuracy level: 1.6% 2.5%
Connection method: 7/16
Shell material: stainless steel
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper

耐震压力表和全不锈钢压力表

Shockproof pressure gauge and all stainless steel pressure gauge



外形尺寸: 2.5' 63mm
压力范围: 0~1.5MPa
精度等级: 1.6% 2.5%
连接方式: 7/16
外壳材质: 不锈钢
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 2.5' 63mm
Pressure range: 0~1.5MPa
Accuracy level: 1.6% 2.5%
Connection method: 7/16
Shell material: stainless steel
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper



外形尺寸: 2.5' 63mm
压力范围: 0~3.5MPa
精度等级: 1.6% 2.5%
连接方式: 7/16
外壳材质: 不锈钢
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 2.5' 63mm
Pressure range: 0~3.5MPa
Accuracy level: 1.6% 2.5%
Connection method: 7/16
Shell material: stainless steel
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper



外形尺寸: 2' 50mm
压力范围: 0~70KG
精度等级: 1.6% 2.5%
连接方式: 1/4NPT
外壳材质: 不锈钢
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 2' 50mm
Pressure range: 0~70KG
Accuracy level: 1.6% 2.5%
Connection method: 1/4NPT
Shell material: stainless steel
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper



外形尺寸: 2' 50mm
压力范围: -1KG
精度等级: 1.6% 2.5%
连接方式: 1/4PT
外壳材质: 不锈钢
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 2' 50mm
Pressure range: -1KG
Accuracy level: 1.6% 2.5%
Connection method: 1/4PT
Shell material: stainless steel
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper

耐震压力表和全不锈钢压力表

Shockproof pressure gauge and all stainless steel pressure gauge



外形尺寸: 2.5' 63mm
压力范围: 0~10KG
精度等级: 1.6% 2.5%
连接方式: 1/4PT
外壳材质: 不锈钢
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 2.5' 63mm
Pressure range: 0~10KG
Accuracy level: 1.6% 2.5%
Connection method: 1/4PT
Shell material: stainless steel
Connection material: stainless steel
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper



外形尺寸: 2.5' 63mm
压力范围: 0~60bar
精度等级: 1.6% 2.5%
连接方式: 1/4PT
外壳材质: 不锈钢
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 2.5' 63mm
Pressure range: 0~60bar
Accuracy level: 1.6% 2.5%
Connection method: 1/4PT
Shell material: stainless steel
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper



外形尺寸: 2.5' 63mm
压力范围: 0~100PSI
精度等级: 1.6% 2.5%
连接方式: 1/4PT
外壳材质: 不锈钢
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 2.5' 63mm
Pressure range: 0~100PSI
Accuracy level: 1.6% 2.5%
Connection method: 1/4PT
Shell material: stainless steel
Connection material: stainless steel
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper



外形尺寸: 2.5' 63mm
压力范围: 0~6bar
精度等级: 1.6% 2.5%
连接方式: 1/4G
外壳材质: 不锈钢
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 2.5' 63mm
Pressure range: 0~6bar
Accuracy level: 1.6% 2.5%
Connection method: 1/4G
Shell material: stainless steel
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper

耐震压力表和全不锈钢压力表

Shockproof pressure gauge and all stainless steel pressure gauge



外经尺寸: 0-2.5MPA
压力范围: 0-21kg
精度等级: 1.6% 2.5%
连接方式: 1/4G
外壳材质: 不锈钢
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 0-2.5MPA
Pressure range: 0-21kg
Accuracy level: 1.6% 2.5%
Connection method: 1/4G
Shell material: stainless steel
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper



外经尺寸: 2.5' 63mm
压力范围: 0-100bar
精度等级: 1.6% 2.5%
连接方式: 1/4PT
外壳材质: 不锈钢
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 2.5' 63mm
Pressure range: 0-100bar
Accuracy level: 1.6% 2.5%
Connection method: 1/4PT
Shell material: stainless steel
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper



外经尺寸: 2' 50mm
压力范围: 0-100KG
精度等级: 1.6% 2.5%
连接方式: 1/4PT
外壳材质: 不锈钢
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 2'50mm
Pressure range: 0-100KG
Accuracy level: 1.6% 2.5%
Connection method: 1/4PT
Shell material: stainless steel
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper



外经尺寸: 2.5' 63mm
压力范围: 0-10MPa
精度等级: 1.6% 2.5%
连接方式: 1/4PT
外壳材质: 不锈钢
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 2.5' 63mm
Pressure range: 0-10MPa
Accuracy level: 1.6% 2.5%
Connection method: 1/4PT
Shell material: stainless steel
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper

耐震压力表和全不锈钢压力表

Shockproof pressure gauge and all stainless steel pressure gauge



外经尺寸: 2' 50mm
压力范围: 0-20kg
精度等级: 1.6% 2.5%
连接方式: 1/4PT
外壳材质: 不锈钢
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 2'50mm
Pressure range: 0-20kg
Accuracy level: 1.6% 2.5%
Connection method: 1/4PT
Shell material: stainless steel
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper



外经尺寸: 2' 50mm
压力范围: 0-7bar
精度等级: 1.6% 2.5%
连接方式: 1/4PT
外壳材质: 不锈钢
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 2'50mm
Pressure range: 0-7bar
Accuracy level: 1.6% 2.5%
Connection method: 1/4PT
Shell material: stainless steel
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper



外经尺寸: 2.5' 63mm
压力范围: 0-40bar
精度等级: 1.6% 2.5%
连接方式: 1/4BSP
外壳材质: 不锈钢
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 2.5' 63mm
Pressure range: 0-40bar
Accuracy level: 1.6% 2.5%
Connection method: 1/4BSP
Shell material: stainless steel
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper



外经尺寸: 2.5' 63mm
压力范围: 0-1.6MPa
精度等级: 1.6% 2.5%
连接方式: 1/4PT
外壳材质: 不锈钢
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 2.5' 63mm
Pressure range: 0-1.6MPa
Accuracy level: 1.6% 2.5%
Connection method: 1/4PT
Shell material: stainless steel
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper

双针压力表
Double needle pressure gauge



外经尺寸: 2.5" 63mm
压力范围: 0-4bar
精度等级: 1.6% 2.5%
连接方式: 1/4PT
外壳材质: 铁
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 2.5" 63mm
Pressure range: 0-4bar
Accuracy level: 1.6% 2.5%
Connection method: 1/4PT
Shell material: iron
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper



外经尺寸: 2.5" 63mm
压力范围: 0-60bar
精度等级: 1.6% 2.5%
连接方式: 1/4G
外壳材质: 铁
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 2.5" 63mm
Pressure range: 0-60bar
Accuracy level: 1.6% 2.5%
Connection method: 1/4G
Shell material: iron
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper

耐震压力表系列 Shockproof pressure gauge series



外经尺寸: 1.5" 40mm
压力范围: 0-2.5MPa/375psi
精度等级: 1.6% 2.5%
连接方式: 1/8PT
外壳材质: 不锈钢
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 1.5" 40mm
Pressure range: 0-2.5MPa/375psi
Accuracy level: 1.6% 2.5%
Connection method: 1/8PT
Shell material: stainless steel
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper



外经尺寸: 1.5" 40mm
压力范围: 0-0.6MPa/90PSI
精度等级: 1.6% 2.5%
连接方式: 1/8PT
外壳材质: 不锈钢
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 1.5" 40mm
Pressure range: 0-0.6MPa/90PSI
Accuracy level: 1.6% 2.5%
Connection method: 1/8PT
Shell material: stainless steel
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper

耐震压力表系列 Shockproof pressure gauge series



外经尺寸: 1.5" 40mm
压力范围: 0-15kg/200psi
精度等级: 1.6% 2.5%
连接方式: 1/8NPT
外壳材质: 不锈钢
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 1.5" 40mm
Pressure range: 0-15kg/200psi
Accuracy level: 1.6% 2.5%
Connection method: 1/8NPT
Shell material: stainless steel
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper



外经尺寸: 1.5" 40mm
压力范围: 0-10kg/150psi
精度等级: 1.6% 2.5%
连接方式: 1/8NPT
外壳材质: 不锈钢
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 1.5" 40mm
Pressure range: 0-10kg/150psi
Accuracy level: 1.6% 2.5%
Connection method: 1/8NPT
Shell material: stainless steel
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper



外经尺寸: 1.5" 40mm
压力范围: 0-10kg/150psi
精度等级: 1.6% 2.5%
连接方式: 1/8NPT
外壳材质: 不锈钢
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 1.5" 40mm
Pressure range: 0-10kg/150psi
Accuracy level: 1.6% 2.5%
Connection method: 1/8NPT
Shell material: stainless steel
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper



外经尺寸: 1.5" 40mm
压力范围: 0-10kg/150psi
精度等级: 1.6% 2.5%
连接方式: 1/8NPT
外壳材质: 不锈钢, 铁
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 1.5" 40mm
Pressure range: 0-10kg/150psi
Accuracy level: 1.6% 2.5%
Connection method: 1/8NPT
Shell material: stainless steel, iron
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper

耐震压力表系列 Shockproof pressure gauge series



外经尺寸: 1.5" 40mm
压力范围: 0-10kg/150psi
精度等级: 1.6% 2.5%
连接方式: 1/8PT
外壳材质: 不锈钢
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 1.5" 40mm
Pressure range: 0-10kg/150psi
Accuracy level: 1.6% 2.5%
Connection method: 1/8PT
Shell material: stainless steel
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper



外经尺寸: 1.5" 40mm
压力范围: -1kg
精度等级: 1.6% 2.5%
连接方式: 1/4PT
外壳材质: 不锈钢
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 1.5" 40mm
Pressure range: -1kg
Accuracy level: 1.6% 2.5%
Connection method: 1/4PT
Shell material: stainless steel
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper



外经尺寸: 1.5" 40mm
压力范围: 0-16bar
精度等级: 1.6% 2.5%
连接方式: 1/8PT
外壳材质: 不锈钢
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 1.5" 40mm
Pressure range: 0-16bar
Accuracy level: 1.6% 2.5%
Connection method: 1/8PT
Shell material: stainless steel
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper



外经尺寸: 1.5" 40mm
压力范围: 0-25kg/375psi
精度等级: 1.6% 2.5%
连接方式: 1/8PT
外壳材质: 不锈钢
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 1.5" 40mm
Pressure range: 0-25kg/375psi
Accuracy level: 1.6% 2.5%
Connection method: 1/8PT
Shell material: stainless steel
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper

普通压力表系列 Ordinary pressure gauge series




外经尺寸: 1.5" 40mm
压力范围: 0-6KG
精度等级: 1.6% 2.5%
连接方式: 1/8PT
外壳材质: 铁
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 1.5" 40mm
Pressure range: 0-6KG
Accuracy level: 1.6% 2.5%
Connection method: 1/8PT
Shell material: iron
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper



外经尺寸: 1.5" 40mm
压力范围: 0-1MPa/150PSI
精度等级: 1.6% 2.5%
连接方式: 1/8PT
外壳材质: 不锈钢
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 1.5" 40mm
Pressure range: 0-1MPa/150PSI
Accuracy level: 1.6% 2.5%
Connection method: 1/8PT
Shell material: stainless steel
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper

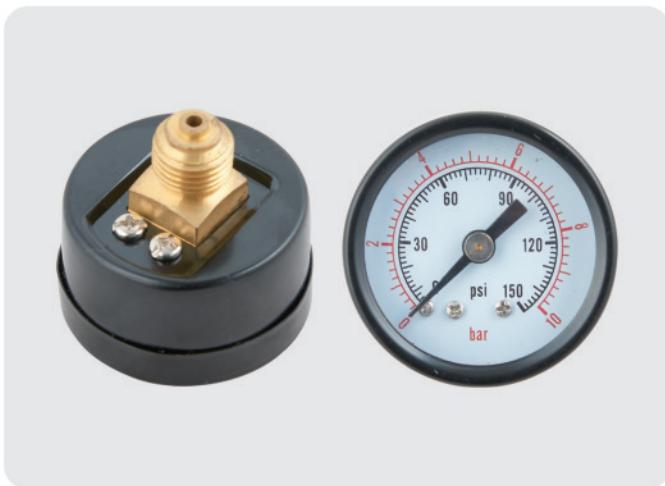

外经尺寸: 1.5" 40mm
压力范围: 0-10bar/150psi
精度等级: 1.6% 2.5%
连接方式: 1/8BSP
外壳材质: 铁
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 1.5" 40mm
Pressure range: 0-10bar/150psi
Accuracy level: 1.6% 2.5%
Connection method: 1/8BSP
Shell material: iron
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper



外经尺寸: 1.5" 40mm
压力范围: 0-2.5MPa/375psi
精度等级: 1.6% 2.5%
连接方式: 1/8PT
外壳材质: 铁
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 1.5" 40mm
Pressure range: 0-2.5MPa/375psi
Accuracy level: 1.6% 2.5%
Connection method: 1/8PT
Shell material: iron
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper

普通压力表系列 Ordinary pressure gauge series



外经尺寸: 1.5" 40mm
压力范围: 0-10bar/150psi
精度等级: 1.6% 2.5%
连接方式: 1/8BSP
外壳材质: 铁
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 1.5" 40mm
Pressure range: 0-10bar/150psi
Accuracy level: 1.6% 2.5%
Connection method: 1/8BSP
Shell material: iron
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper



外经尺寸: 2" 50mm
压力范围: 0-5MPa/700PSI
精度等级: 1.6% 2.5%
连接方式: 1/4NPT
外壳材质: 铁
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 2" 50mm
Pressure range: 0-5MPa/700PSI
Accuracy level: 1.6% 2.5%
Connection method: 1/4NPT
Shell material: iron
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper



外经尺寸: 2" 50mm
压力范围: 0-10bar/150psi
精度等级: 1.6% 2.5%
连接方式: 1/4BSP
外壳材质: 铁
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 2" 50mm
Pressure range: 0-10bar/150psi
Accuracy level: 1.6% 2.5%
Connection method: 1/4BSP
Shell material: iron
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper



外经尺寸: 2.5" 63mm
压力范围: 0-60bar
精度等级: 1.6% 2.5%
连接方式: 1/4NPT
外壳材质: 铁
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 2.5" 63mm
Pressure range: 0-60bar
Accuracy level: 1.6% 2.5%
Connection method: 1/4NPT
Shell material: plastic
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper

普通压力表系列 Ordinary pressure gauge series



外经尺寸: 2.5" 63mm
压力范围: 0-10bar/150psi
精度等级: 1.6% 2.5%
连接方式: 1/4BSP
外壳材质: 铁
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 2.5" 63mm
Pressure range: 0-10bar/150psi
Accuracy level: 1.6% 2.5%
Connection method: 1/4BSP
Shell material: iron
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper



外经尺寸: 2.5" 63mm
压力范围: 0-2.5MPa
精度等级: 1.6% 2.5%
连接方式: 1/4PT
外壳材质: 铁
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 2.5" 63mm
Pressure range: 0-2.5MPa
Accuracy level: 1.6% 2.5%
Connection method: 1/4PT
Shell material: iron
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper



外经尺寸: 4" 100mm
压力范围: 0-15KG
精度等级: 1.6% 2.5%
连接方式: 3/8PT
外壳材质: 铁
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 4" 100mm
Pressure range: 0-15KG
Accuracy level: 1.6% 2.5%
Connection method: 3/8PT
Shell material: iron
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper



外经尺寸: 70mm
压力范围: 0-3.5MPa/500psi
精度等级: 1.6% 2.5%
连接方式: 1/8NPT
外壳材质: 铁
连接材质: 铜
窗口材质: 玻璃或塑料
针和盘材质: 铝
内部材质: 铜

Outside size: 70mm
Pressure range: 0-3.5MPa/500psi
Accuracy level: 1.6% 2.5%
Connection method: 1/8NPT
Shell material: iron
Connection material: copper
Window material: glass or plastic
Needle and disc material: aluminum
Internal material: copper